



Standard Terminology Relating to Barbed Tape¹

This standard is issued under the fixed designation F 1379; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This terminology is intended for use by barbed tape specifiers and end-users to give a general understanding of the types, sizes, and configuration of barbed tape.

2. Terminology

attachment points, n —points where alternate pairs of coil loops are joined around the circumference creating the concertina effect. (1992)

barb length, n —measured from the barb point to the center line of the barb cluster. (1992)

barb length classification, n —commonly used barbed types describing length and shape; such as long barb, medium barb, and short barb. (1995)

barb spacing, n —the circumferential or linear distance between the center lines of the barb clusters. (1992)

barbed tape, n —strip of metal, machined to produce clusters of sharp points. (1992)

clip, n —a mechanical means of joining two loops. (1992)

coil loop, n —one complete rotation (360°) of barbed tape. (1995)

coil rotation, n —the spiraling effect that occurs as the concertina coils are deployed. (1993)

concertina, n —a pattern formed by attaching adjacent loops of helical coils to one another at specified points on the circumference, resulting in an accordion-like configuration. (1992)

concertina spacing, n —distance between adjacent concertina attachments in a concertina configuration, as measured down the length of the extended coil (also called *concertina attachment spacing*). (1992)

cross section, n —shows the width and thickness of material, including the center section's shape, core diameter, and core wrap. (See Figs. 1-3 for types.) (1993)




FIG. 1 Cross Section

deployed length, n —the coils as extended for use. It is specified by the coverage where:

Helical coverage = number of coil loops per unit \times helical loop spacing

Concertina coverage = number of coil loops divided by 2 \times concertina loop spacing. (1992)

diameter, n —specified size diameters shall be measured across the center line of the packaged coil with a tolerance of ± 2 in.; installed diameters are always less than the packaged diameter of the coil. (1992)

double coil, n —a configuration where a smaller diameter coil is placed inside a larger diameter coil. The assembled rolls may be either concertina style or helical style. (1993).

DISCUSSION— 1. Concertina style, for example, the 24 and 30-in. [61 and 76-mm] diameter coils are attached together at both ends for installation purposes.

DISCUSSION— 2. Helical style, for example, the 24 and 30-in. [61 and 76-mm] diameter coils are alternately attached together throughout the roll in four places around the circumference. In addition, one coil is fabricated in reverse helix to the companion coil.

double loop ties, n —twistable ties used to secure the barbed tape at the tie point (also known as *bag ties*). (1993)

flange, n —the extension of the wrap beyond the core wire or stiffening groove. See Fig. 4. (1993)

helical, n —the most simple pattern in a barbed tape coil where there are no concertina attachments and each coil loop is left free in its natural spiral (also called *spiral*). (1992)




FIG. 2 Cross Section



FIG. 3 Cross Section

¹ This terminology is under the jurisdiction of ASTM Committee F14 on Fences and is the direct responsibility of Subcommittee F14.40 on Chain Link Fence and Wire Accessories.

Current edition approved January 10, 2003. Published March 2003. Originally approved in 1992. Last previous edition approved in 1995 as F 1379 - 95.

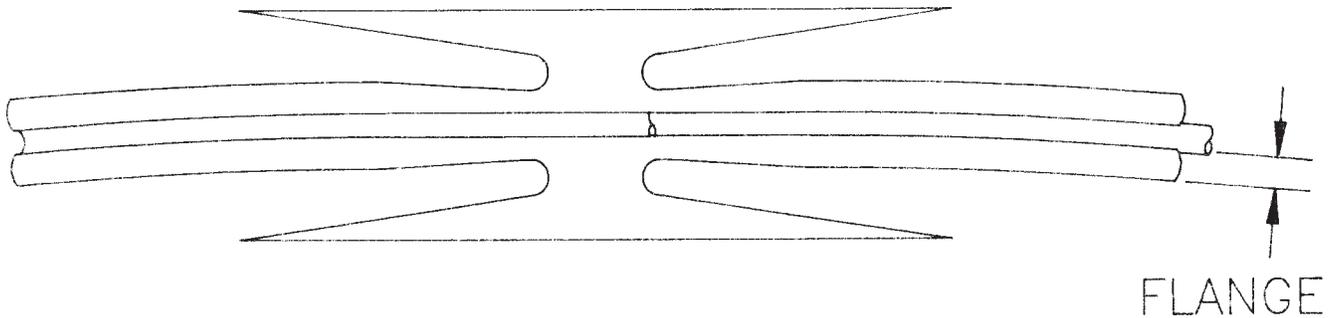


FIG. 4 Flange



FIG. 5 Off Set Barbs

helical loop spacing, *n*—average distance between each coil loop in a helical coil configuration. (1992)

long barb, *n*—barbs having an average length of $1.2 \pm 5\%$. (1995)

loop spacer wire, *n*—wire that is attached loop-to-loop (or on consecutive attachment points) on the barbed tape to preset the loop spacing. (1992)

medium barb, *n*—barbs having an average length of $0.4 \pm 5\%$. (1995)

off set barbs, *n*—angling of the barb cluster from the center line of the tape in opposite directions. See Fig. 5. (1993)

short barb, *n*—barbs having an average length of $0.1875 \pm 5\%$. (1995)

single coil, *n*—a configuration where there is one coil with one

diameter, the coil being either helical or concertina style. (1992)

spot welds, *n*—means of permanently joining two adjacent coil loops by fusing them through a heat or electrical process. (1993)

splice connections, *n*—joining of consecutive coils. (1993)

splicing tail, *n*—the barb clusters extending beyond the last attachment at both ends of the coil. (1993)

tie points, *n*—the location where ties are placed securing the coils to brackets, wires, or cables including fence fabric, at the specified spacing. (1993)

wire rings (hog rings), *n*—wires formed to make attachments during splicing or under certain conditions to serve as an alternate to the tie wires (see *double loop ties*). (1993)

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).